

 confemak

2026



CATALOG



www.confemak.com

HAKKIMIZDA

CONFEMAK, ÇIKOLATA VE ŞEKERLEME MAKİNELERİ ALANINDA UZMANLAŞMIŞ BİR ŞİRKETTİR. 20 YILLIK DENEYİMİMİZLE, SEKTÖRDEKİ YENİLİKÇİ ÇÖZÜMLERİMİZLE MÜŞTERİLERİMİZE KALITELİ HİZMET SUNMAKTAYIZ. MÜŞTERİ MEMNUNİYETİNİ ÖNCELİĞİMİZ OLARAK BELİRLEYEREK, ÜRETİM SÜREÇLERİNİZİ OPTİMİZE EDEN VE VERİMLİLİĞİ ARTIRAN MAKİNELER GELİŞTİRMEKTEYİZ.

EKİBİMİZ, MÜHENDİSLİK VE ÜRETİM ALANINDA UZMANLAŞMIŞ PROFESYONELLERDEN OLUŞMAKTADIR. MÜŞTERİLERİMİZİN İHTİYAÇLARINA UYGUN ÖZEL MAKİNELER TASARLAMAK İÇİN SÜREKLİ OLARAK AR-GE ÇALIŞMALARI YAPMAKTAYIZ. AMACIMIZ, ÇIKOLATA VE ŞEKERLEME ÜRETİMİNİ DAHA VERİMLİ VE SÜRDÜRÜLEBİLİR HALE GETİRMEKTİR.

SEKTÖRÜMÜZDE LİDER BİR MARKA OLARAK, ÇIKOLATA VE ŞEKERLEME MAKİNELERİ ALANINDA EN YENİLİKÇİ VE KALITELİ ÇÖZÜMLERİ SUNARAK, GLOBAL PAZARDA TANINAN BİR ŞİRKET OLMAYI HEDEFLİYORUZ. MÜŞTERİ ODAKLI YAKLAŞIMIMIZLA, ÇIKOLATA VE ŞEKERLEME ÜRETİCİLERİNE YÜKSEK KALITELİ MAKİNELER VE HİZMETLER SUNARAK, ÜRETİM SÜREÇLERİNİ OPTİMİZE ETMEYİ, VERİMLİLİĞİ ARTIRMAYI VE SEKTÖRDEKİ GELİŞMELERE ÖNCÜLÜK ETMEYİ MİSYON EDİNİYORUZ.

CONFEMAK IS A COMPANY SPECIALIZED IN CHOCOLATE AND CONFECTIONERY MACHINES. WITH 20 YEARS OF EXPERIENCE, WE PROVIDE OUR CUSTOMERS WITH INNOVATIVE SOLUTIONS AND HIGH-QUALITY SERVICE IN THE INDUSTRY. WE PRIORITIZE CUSTOMER SATISFACTION BY DEVELOPING MACHINES THAT OPTIMIZE YOUR PRODUCTION PROCESSES AND ENHANCE EFFICIENCY.

OUR TEAM CONSISTS OF PROFESSIONALS SPECIALIZED IN ENGINEERING AND MANUFACTURING. WE CONTINUOUSLY CONDUCT R&D TO DESIGN CUSTOM MACHINES TAILORED TO OUR CLIENTS' NEEDS. OUR GOAL IS TO MAKE CHOCOLATE AND CONFECTIONERY PRODUCTION MORE EFFICIENT AND SUSTAINABLE.

AS A LEADING BRAND IN OUR INDUSTRY, WE AIM TO OFFER THE MOST INNOVATIVE AND HIGH-QUALITY SOLUTIONS IN CHOCOLATE AND CONFECTIONERY MACHINERY, BECOMING A RECOGNIZED COMPANY IN THE GLOBAL MARKET.

WITH OUR CUSTOMER-ORIENTED APPROACH, WE ARE COMMITTED TO PROVIDING HIGH-QUALITY MACHINES AND SERVICES TO CHOCOLATE AND CONFECTIONERY MANUFACTURERS, OPTIMIZING PRODUCTION PROCESSES, INCREASING EFFICIENCY, AND LEADING ADVANCEMENTS IN THE SECTOR.



1

ÇİKOLATA KALIPLAMA SHELL HATTI OTOMATİK
CHOCOLATE SHELL MOLDING LINE AUTOMATIC

2

ÇİKOLATA KALIPLAMA HATTI OTOMATİK
AUTOMATIC CHOCOLATE MOLDING LINE.

3

ÇİKOLATA ONE SHOT KALIPLAMA HATTI
CHOCOLATE ONE-SHOT MOLDING LINE

4

ÇİKOLATA ONE SHOT TANDEM KALIPLAMA HATTI
CHOCOLATE ONE-SHOT TANDEM MOLDING LINE

5

ÇİKOLATA ONE SHOT KALIPLAMA HATTI (L TIPI)
CHOCOLATE ONE-SHOT MOLDING LINE (L TYPE)

6

DAMLA ÇİKOLATA HATTI
CHOCOLATE CHIP LINE

7

ÇİKOLATA TEMPERLEME MAKİNESİ
CHOCOLATE TEMPERING MACHINE

8

ÇİKOLATA BİLYA DEĞİRMENİ
CHOCOLATE BALL MILL

9

SÜREKLİ BİLYALI DEĞİRMEN
CONTINUOUS BALL MILL

10

ÇİKOLATA STOK TANKI
CHOCOLATE STORAGE TANK

11

ÇİKOLATA ÖN HAZIRLAMA TANKI
CHOCOLATE PREPARATION TANK

12

TURBO MİKSER
TURBO MIXER

13

YAĞ ERITME TANKI
FAT MELTING TANK

14

PUDRA DEĞİRMENİ
POWDER MILL

15

ÇİKOLATA KAPLAMA HATTI
CHOCOLATE COATING LINE




CHOCOLATE MOLDING SHELL LINE (AUTOMATIC)

OTOMATİK ÇIKOLATA KABUK KALIPLAMA MAKİNESİ İLE KATI ÇIKOLATA, KREMA DOLGULU ÇIKOLATA, ÇİFT RENKLI VEYA ÜÇ RENKLI ÇIKOLATA, ÇİFT KATMAN DOLGULU ÇIKOLATA, 2-4 MM ARALIĞINDA GEVREK, BADEM, CEVİZ, FINDIK, FISTIK, SUSAM GIBI PARÇACIKLARLA KATI ÇIKOLATA VEYA DOLGULU ÇIKOLATA, TÜM FINDIKLI DOLGULU ÇIKOLATALAR ÜRETİLEBİLİR.

BUNLARA EK YÜKSEK DOLGU ORANI İLE JÖLE, KAREMEL, SIVI DOLGULU ÇIKOLATALAR ÜRETİLEBİLMEKTEDİR. HATTIN ÜZERİNDE KENDİ SOĞUTMA TÜNELİ, OTOMATİK KALİPTAN ÇIKARMA ÜNİTELERİ MEVCUTTUR. KALİPTAN ÇIKAN ÜRÜNLER PAKETLENMEK İÇİN BANDA OTOMATİK OLARAK AKTARILIR.

THE AUTOMATIC CHOCOLATE SHELL MOLDING MACHINE CAN PRODUCE SOLID CHOCOLATE, CREAM-FILLED CHOCOLATE, TWO-COLOR OR THREE-COLOR CHOCOLATE, DOUBLE-LAYERED FILLED CHOCOLATE, AND CHOCOLATE WITH CRISPY PIECES RANGING FROM 2-4 MM, SUCH AS ALMONDS, WALNUTS, HAZELNUTS, PISTACHIOS, AND SESAME SEEDS, AS WELL AS WHOLE HAZELNUT FILLED CHOCOLATES. IN ADDITION, IT CAN PRODUCE JELLY, CARMEL, AND LIQUID-FILLED CHOCOLATES WITH A HIGH FILLING RATIO. THE LINE HAS ITS OWN COOLING TUNNEL AND AUTOMATIC DEMOLDING UNITS. THE PRODUCTS ARE AUTOMATICALLY TRANSFERRED TO THE CONVEYOR BELT FOR PACKAGING.

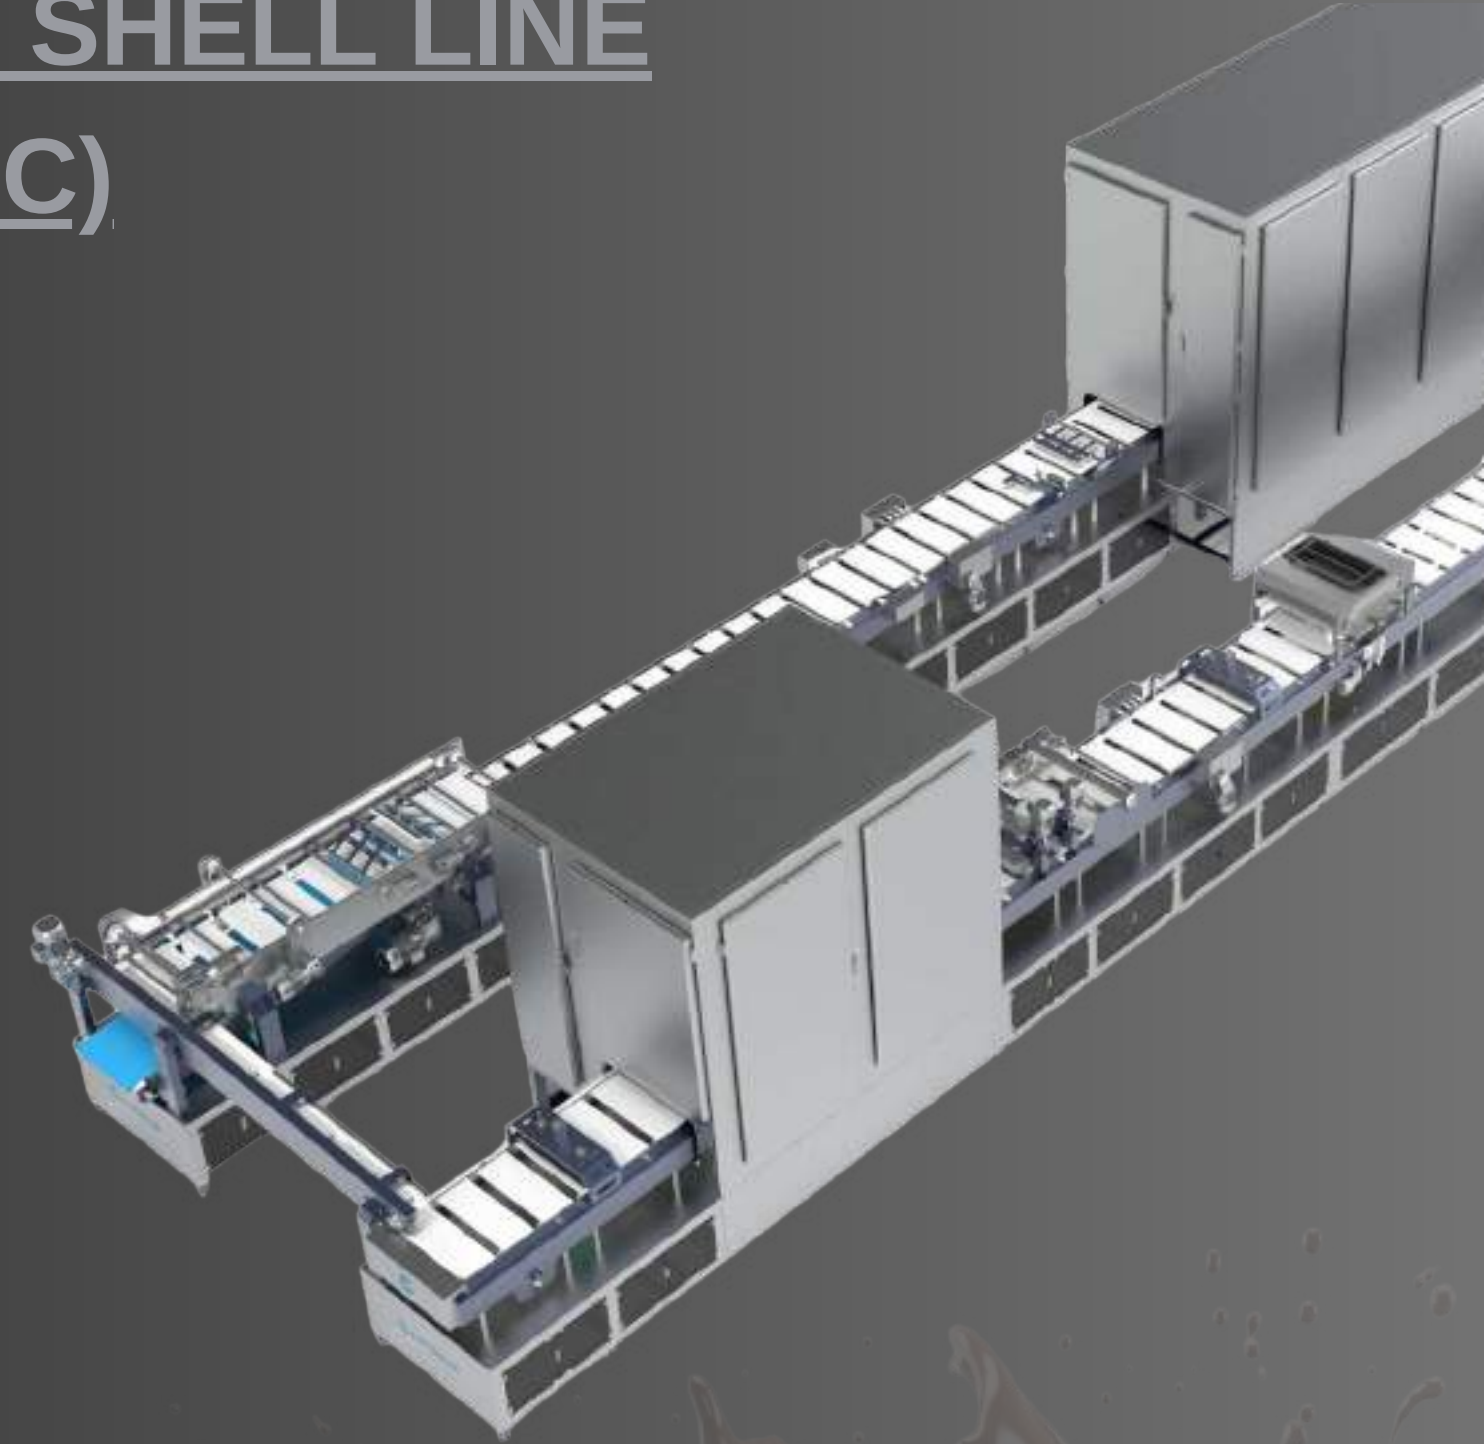


SERİ	CNF.SHELL LINE 1000
KAPASİTE	1000KG/H 15 SHOT
GÜÇ	90 KW / 380 V
GENİŞLİK	4280 MM
UZUNLUK	50000 MM
YÜKSEKLİK	3300 MM
AGIRLIK	KG

SERIAL NO	CNF.SHELL LINE 1000
CAPACTİY	1000 KG/H 15 SHOT
POWER	90 KW / 380 V
WIDTH	4280 MM
LENGTH	50000MM
HEIHHT	3300 MM
AGIRLIK	KG

CHOCOLATE MOLDING LINE (AUTOMATIC)

OTOMATİK ÇIKOLATA KALIPLAMA MAKİNESİ İLE KATI ÇIKOLATA, KREMA DOLGULU ÇIKOLATA, 2-4 MM ARALIĞINDA GEVREK, BADEM, CEVİZ, FINDIK, FISTIK, SUSAM GIBİ PARÇACIKLARLA KATI ÇIKOLATA VEYA DOLGULU ÇIKOLATA, TÜM FINDIKLI ÇIKOLATALAR ÜRETİLEBİLİR. BUNLARA EK YÜKSEK DOLGU ORANI İLE JÖLE, KARMEL, SIVI DOLGULU ÇIKOLATALAR ÜRETİLEBİLMEKTEDİR. HATTIN ÜZERİNDE KENDİ SOĞUTMA TÜNELİ, OTOMATİK KALİPTAN ÇIKARMA ÜNİTELERİ MEVCUTTUR. KALİPTAN ÇIKAN ÜRÜNLER PAKETLENMEK İÇİN BANDA OTOMATİK OLARAK AKTARILIR.

THE AUTOMATIC CHOCOLATE MOLDING MACHINE CAN PRODUCE SOLID CHOCOLATE, CREAM-FILLED CHOCOLATE, CHOCOLATE WITH CRISPY PIECES RANGING FROM 2-4 MM, AND CHOCOLATE WITH WHOLE HAZELNUTS, ALMONDS, WALNUTS, HAZELNUTS, PISTACHIOS, SESAME SEEDS, OR OTHER SIMILAR PARTICLES. IN ADDITION, IT CAN PRODUCE JELLY, CARAMEL, AND LIQUID-FILLED CHOCOLATES WITH A HIGH FILLING RATIO. THE LINE HAS ITS OWN COOLING TUNNEL AND AUTOMATIC DEMOLDING UNITS. THE PRODUCTS ARE AUTOMATICALLY TRANSFERRED TO A CONVEYOR BELT FOR PACKAGING.

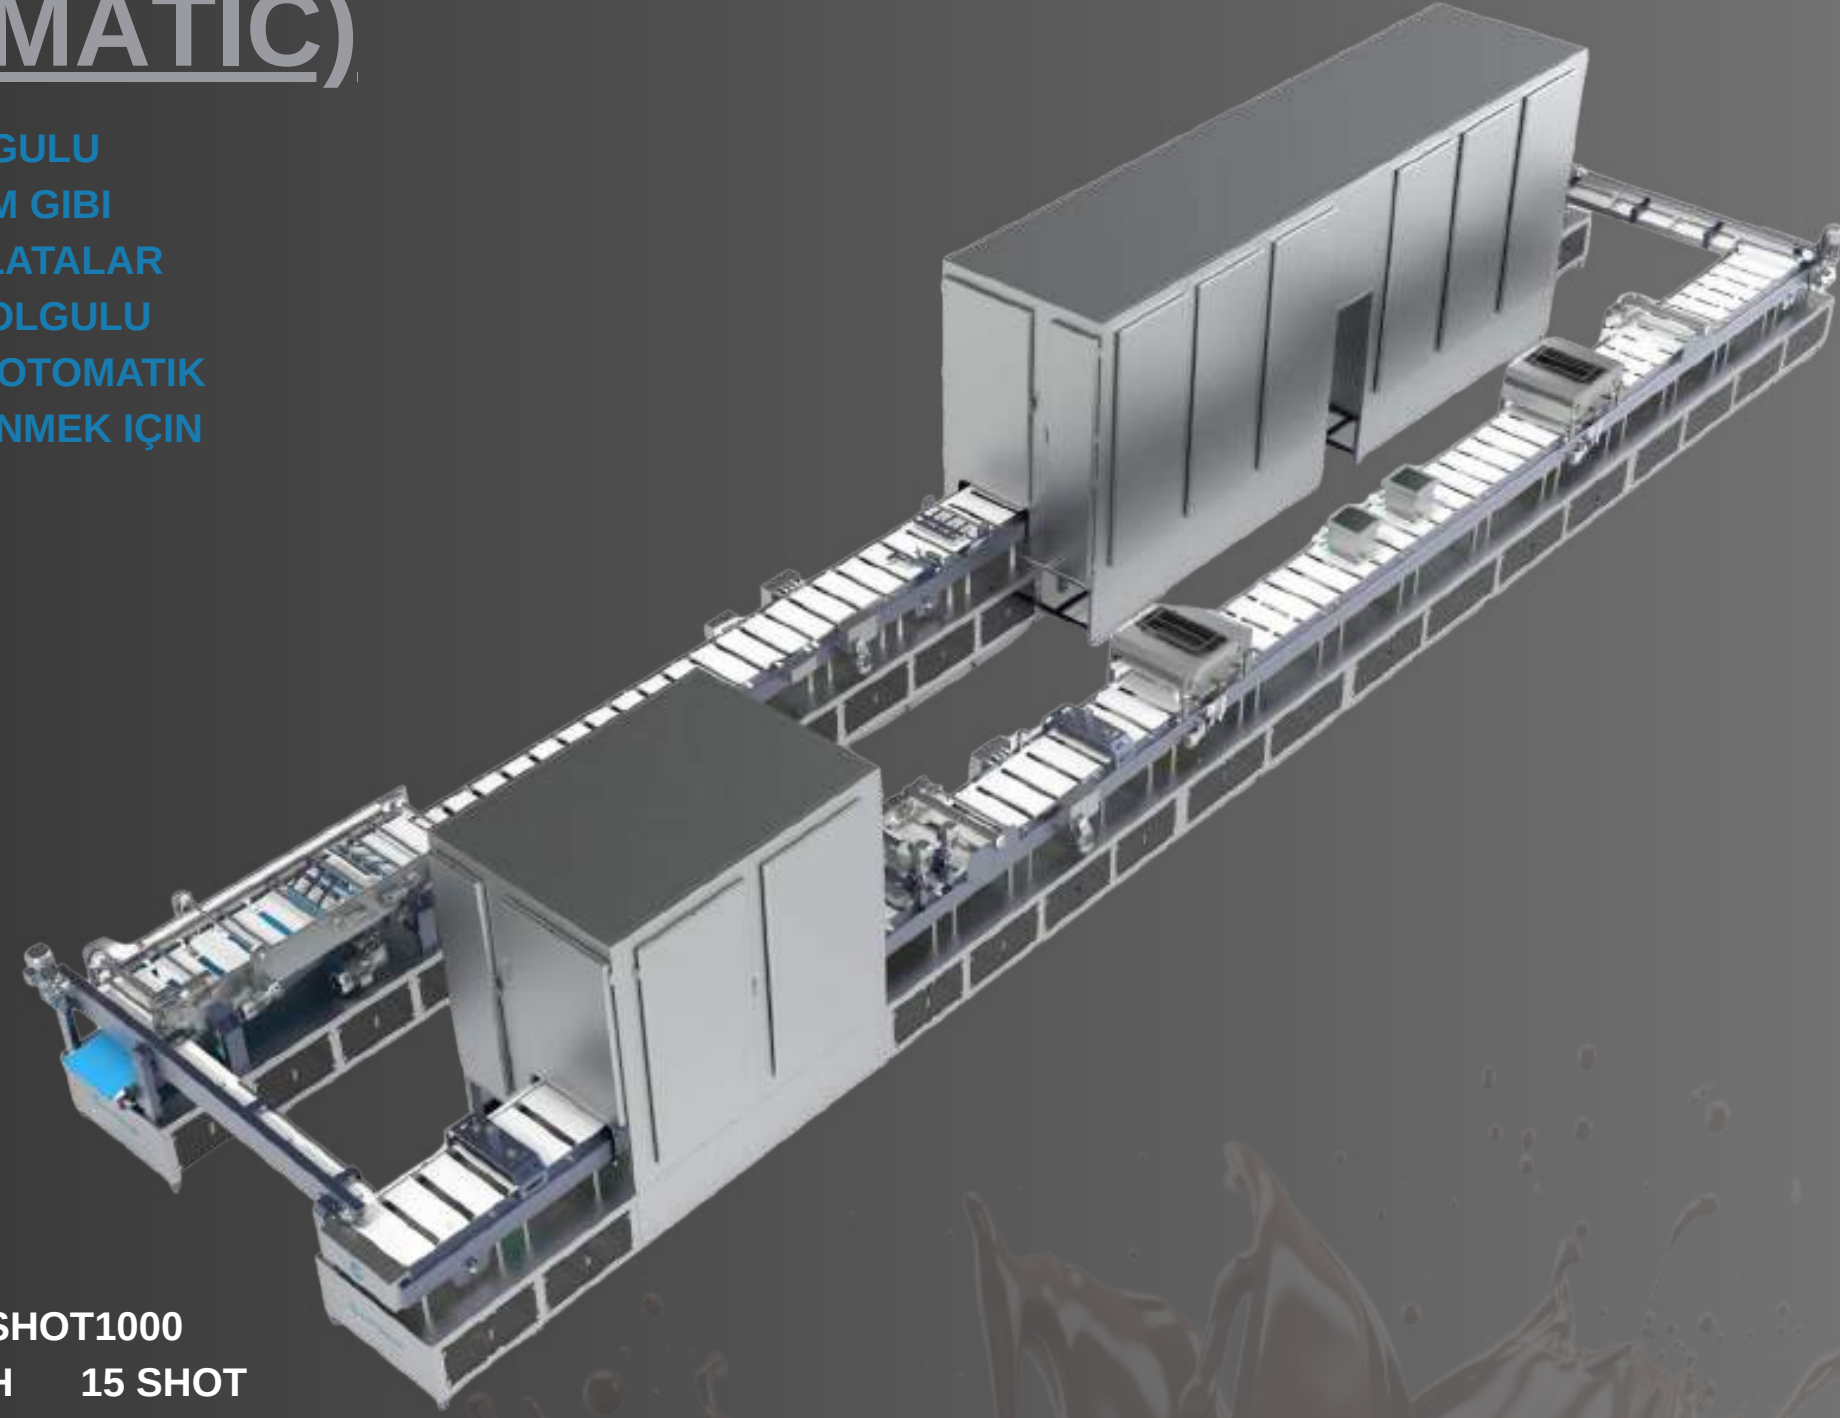

SERİ	CNF.ONESHOT1000
KAPASİTE	1000 KG/H 15 SHOT
GÜÇ	35 KW / 380 V
GENİŞLİK	4280 MM
UZUNLUK	16500 MM
YÜKSEKLİK	3300 MM
AGIRLIK	15000 KG

SERIAL NO	CNF.ONESHOT1000
CAPACTİY	1000 KG/H 15 SHOT
POWER	35 KW / 380 V
WIDTH	4280 MM
LENGTH	16500MM
HEIHHT	3300 MM
AGIRLIK	15000 KG

CHOCOLATE MOLDING LINE


CNF.ONSHOT-500 ÇIKOLATA KALIPLAMA MAKİNESİ İLE KATI ÇIKOLATA, KREMA DOLGULU ÇIKOLATA, TABLET ÇIKOLATALAR ÜRETİLEBİLİR. BUNLARA EK YÜKSEK DOLGU ORANI İLE JÖLE, KAREMEL, SIVI DOLGULU ÇIKOLATALAR ÜRETİLEBİLMEKTEDİR. HATTIN ÜZERİNDE KENDİ SOĞUTMA TÜNELİ MEVCUTTUR.

THE CNF.ONSHOT-500 CHOCOLATE MOLDING MACHINE CAN PRODUCE SOLID CHOCOLATE, CREAM-FILLED CHOCOLATE, AND CHOCOLATE BARS. IN ADDITION, IT CAN PRODUCE JELLY, CARAMEL, AND LIQUID-FILLED CHOCOLATES WITH A HIGH FILLING RATIO. THE LINE HAS ITS OWN COOLING TUNNEL.



SERİ	CNF.ONESHOT500	
KAPASİTE	500 KG/H	15 SHOT
GÜÇ	15 KW /	380 V
GENİŞLİK	1960 MM	
UZUNLUK	12000 MM	
YÜKSEKLİK	3300 MM	
AGIRLIK	5000 KG	


SERIAL NO	CNF.ONESHOT500	
CAPACTİY	500 KG/H	15 SHOT
POWER	15 KW /	380 V
WIDTH	1960 MM	
LENGTH	12000 MM	
HEIHHT	3300 MM	
AGIRLIK	5000 KG	

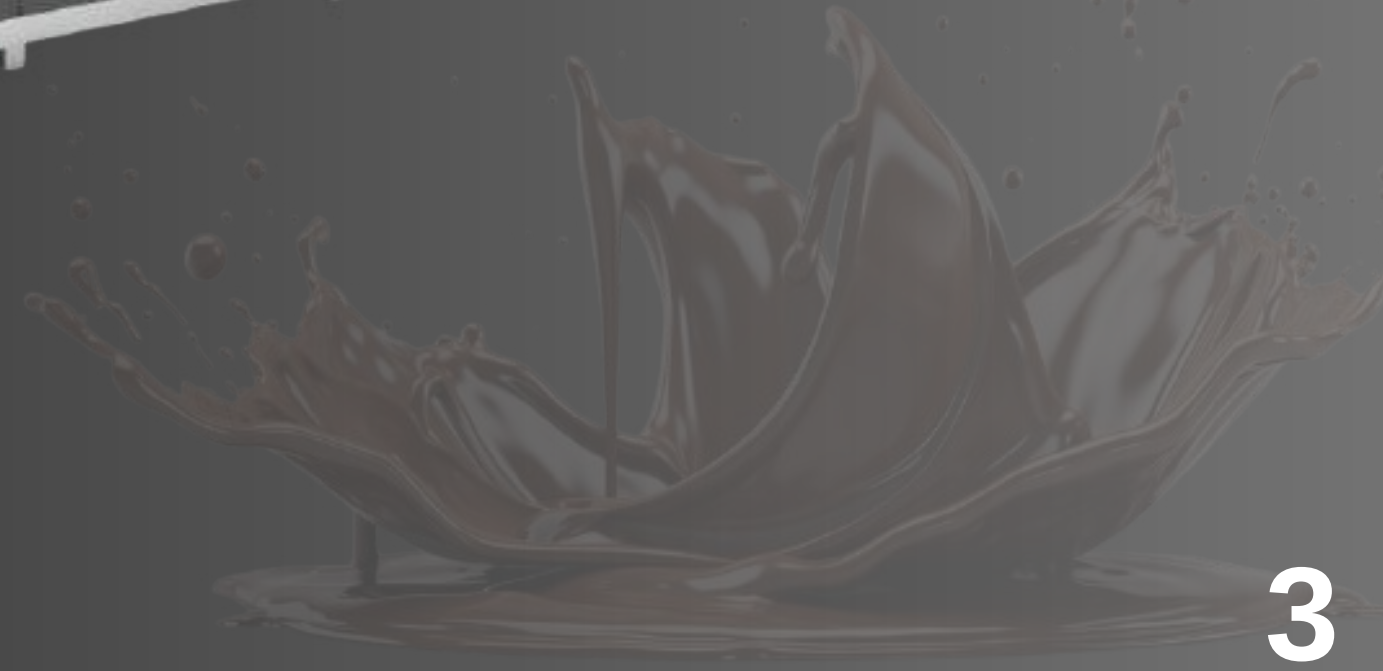

CHOCOLATE MOLDING LINE


CNF.ONSHOT-600 ÇIKOLATA KALIPLAMA MAKİNESİ İLE KATI ÇIKOLATA, KREMA DOLGULU ÇIKOLATA, 2-4 MM ARALIĞINDA GEVREK, BADEM, CEVİZ, FINDIK, FISTIK, SUSAM GIBİ PARÇACIKLARLA KATI ÇIKOLATA VEYA DOLGULU ÇIKOLATA, İSTENİLDİĞİ TAKDIRDE TÜM FINDIK ÜNİTESİ EKLENEREK TÜM FINDIKLI ÇIKOLATALAR ÜRETİLEBİLİR. BUNLARA EK YÜKSEK DOLGU ORANI İLE JÖLE, KAMEL, SIVI DOLGULU ÇIKOLATALAR ÜRETİLEBİLMEKTEDİR.

THE CNF.ONSHOT-600 CHOCOLATE MOLDING MACHINE CAN PRODUCE SOLID CHOCOLATE, CREAM-FILLED CHOCOLATE, AND CHOCOLATE WITH 2-4 MM CRISPY PIECES SUCH AS ALMONDS, WALNUTS, HAZELNUTS, PISTACHIOS, AND SESAME SEEDS. IF DESIRED, A WHOLE HAZELNUT UNIT CAN BE ADDED TO PRODUCE WHOLE HAZELNUT CHOCOLATE. ADDITIONALLY, IT CAN PRODUCE JELLY, CAMEL, AND LIQUID-FILLED CHOCOLATES WITH A HIGH FILLING RATIO.

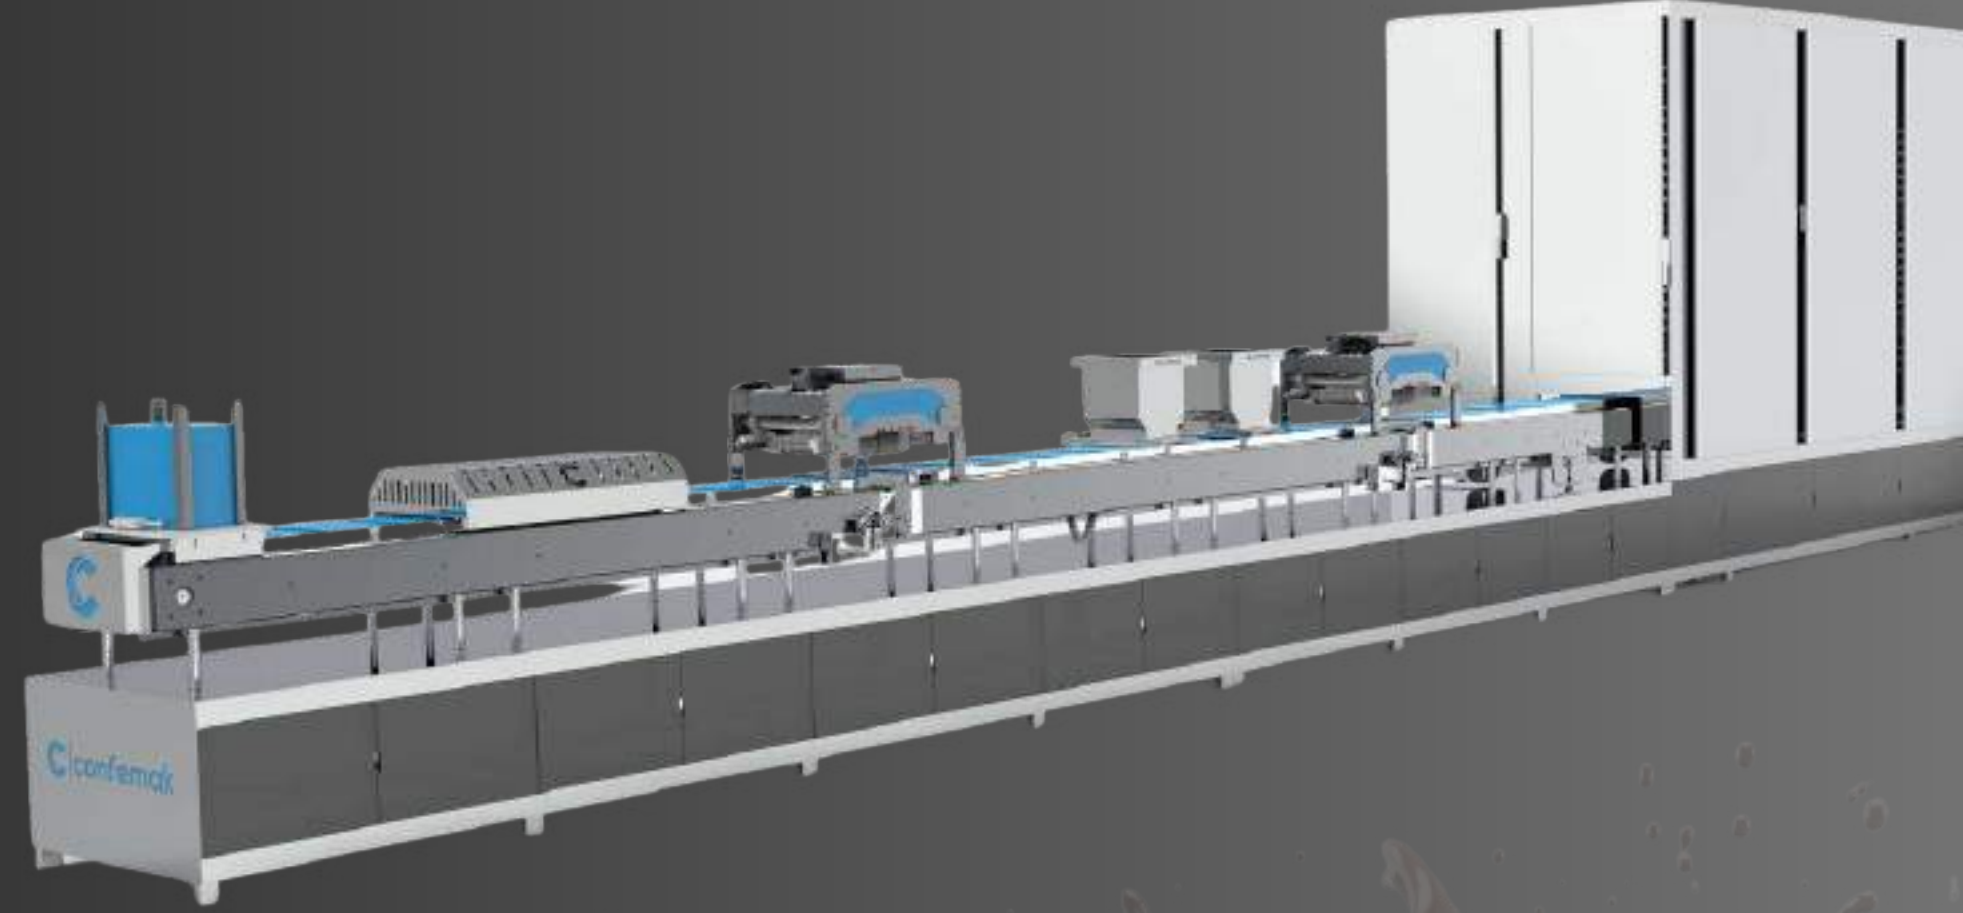

SERİ	CNF.ONESHOT600	
KAPASİTE	600 KG/H	15 SHOT
GÜÇ	18 KW	380 V
GENİŞLİK	1960 MM	
UZUNLUK	15000 MM	
YÜKSEKLİK	3300 MM	
AGIRLIK	6000 KG	

SERIAL NO	CNF.ONESHOT600	
CAPACITY	600 KG/H	15 SHOT
POWER	18 KW	380 V
WIDTH	1960 MM	
LENGTH	15000 MM	
HEIHT	3300 MM	
AGIRLIK	5000 KG	

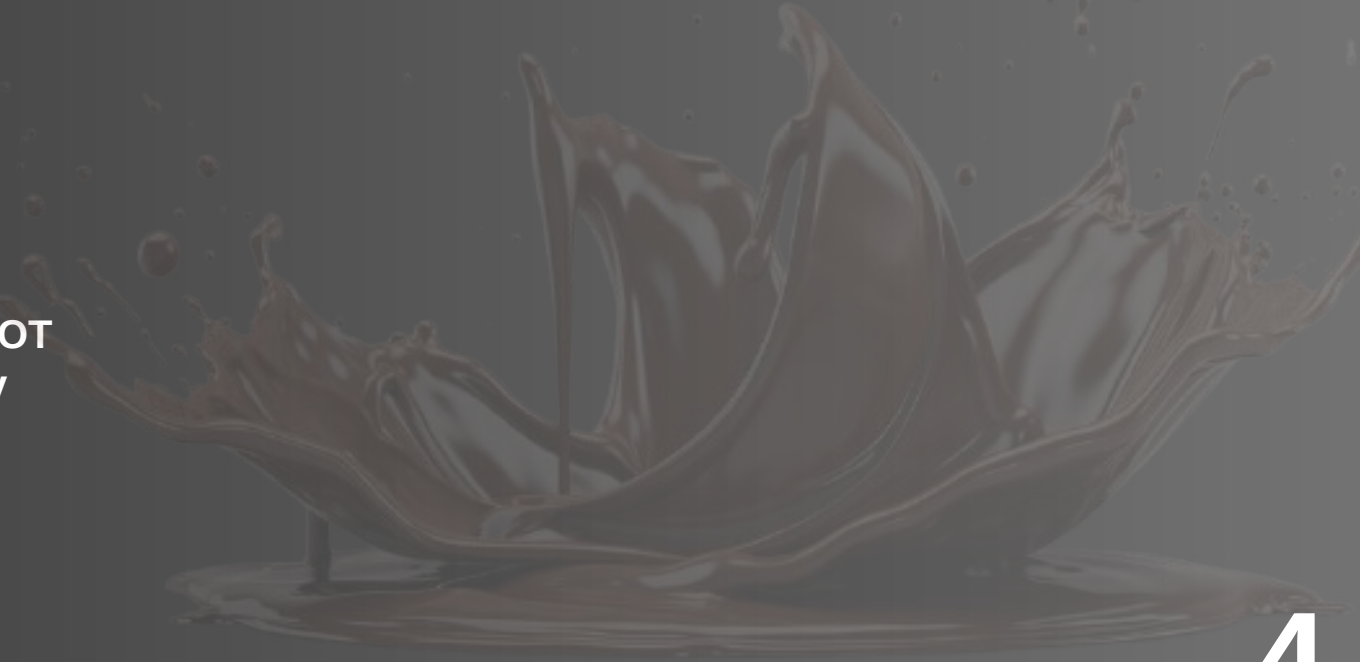

CHOCOLATE MOLDING LINE



SOĞUTMA TÜNELİ İLE BİRLİKTE CNFONSHOT-500 ÇİKOLATA KALIPLAMA HATTI İLE KATI ÇİKOLATA, DOLGULU ÇİKOLATA, ÇİFT RENKLI ÇİKOLATA VE DEĞİŞİK AĞIRLIKLARDA TABLETLER ÜRETİLEBİLİR.

WITH THE CNFONSHOT-500 CHOCOLATE MOULDING LINE WITH COOLING TUNNEL, SOLID CHOCOLATE, FILLED CHOCOLATE, DOUBLE-COLOURED CHOCOLATE AND TABLETS OF VARIOUS WEIGHTS CAN BE PRODUCED.

SERİ	CNF.ONESHOT600	
KAPASİTE	500 KG/H	15 SHOT
GÜÇ	15 KW	380 V
GENİŞLİK	1960 MM	
UZUNLUK	15000 MM	
YÜKSEKLİK	3300 MM	
AĞIRLIK	6000 KG	

SERIAL NO	CNF.ONESHOT600	
CAPACITY	500 KG/H	15 SHOT
POWER	15 KW	380 V
WIDTH	1960 MM	
LENGTH	15000 MM	
HEIHHT	3300 MM	
AĞIRLIK	5000 KG	

CHOCOLATE DROP LINE

ÇIKOLATA DAMLACIKLARI ÜRETMEK, ELDE ETMEK İSTEYENLERİN İHTİYAÇLARINI KARŞILAMAK ÜZERE SAĞLANIR. DEĞİŞTİRİLEBİLİR KASETLER VE AYARLANABİLİR DEPOZİTÖR SAYESİNDE İSTENİLEN ŞEKİL VE AĞIRLIKTAKİ ÜRÜN ELDE EDİLEBİLİR. HATTIN TÜM ÖZELLİKLERİ, KULLANICI DOSTU BİR GELİŞTİRİCİYE SAHİP PLC PANELİNDEN KOLAYCA KONTROL EDİLİR. ÇİFT AÇILABİLİR KAPAKLAR VE KABİN TASARIMI, TEMİZLİK VE BAKIM İÇİN OPTİMUM ERİŞİLEBİLİRLİĞİ SAĞLAR. MERKEZİ KONTROL VE MODÜLER TASARIMI SAYESİNDE HIZLI KURULUM İÇİN UYGUN BİR YAPIYA SAHIPTIR.

IT MEETS THE NEEDS OF THOSE WHO WANT TO PRODUCE AND PRODUCE CHOCOLATE DROPS. INTERCHANGEABLE CASSETTES AND AN ADJUSTABLE DEPOSITOR ALLOW FOR THE PRODUCTION OF PRODUCTS IN ANY DESIRED SHAPE AND WEIGHT. ALL FEATURES OF THE LINE ARE EASILY CONTROLLED FROM A USER-FRIENDLY PLC PANEL. DOUBLE-OPENING DOORS AND A CABINET DESIGN ENSURE OPTIMAL ACCESSIBILITY FOR CLEANING AND MAINTENANCE. CENTRALIZED CONTROL AND A MODULAR DESIGN ALLOW FOR RAPID INSTALLATION.



SERİ	CNF.DRP 500	CNF.DRP 1000	CNF.DRP 2000
KAPASİTE	500 KG/H	1000 KG/H	2000KG/H
GÜÇ	22.5 KW 380 V	25 KW 380 V	28 KW 380 V
GENİŞLİK	1100 MM	1250 MM	1450 MM
UZUNLUK	25000 MM	28000 MM	30000 MM
YÜKSEKLİK	1000 MM	1000 MM	1000 MM

SERIAL NO	CNF.DRP 500	CNF.DRP 1000	CNF.DRP 2000
CAPACITY	500 KG/H	1000 KG/H	2000KG/H
POWER	22.5 KW 380 V	25 KW 380 V	28 KW 380 V
WIDTH	1100 MM	1250 MM	1450 MM
LENGTH	25000 MM	28000 MM	30000 MM
HEIGHT	1000 MM	1000 MM	1000 MM

CHOCOLATE TEMPERING MACHINE

ALIŞILAGELMİŞ GELENEKSEL ENDÜSTRİYEL ÇIKOLATA TEMPERLEME YÖNTEMİNİ EN MÜKEMMEL SONUCU ELDE ETMEK İÇİN YENİDEN TASARLADIK.

TEMPRAA 1000 ÇIKOLATA TEMPERLEME MAKINASI, ÖZEL TASARLANMIŞ SIYIRICI PALET, BENZERSİZ ÜRÜN AKIŞ ÇEVİRİMİ, GÜÇLENDİRİLMİŞ ISI KONTROL SİSTEMİ, KOLAY KULLANIM SUNAN ARAYÜZ EKRANI VE KOMPAKT MAKİNE ÖLÇÜLERİ İLE EN KALİTELİ ÜRÜN ÇIKTISINA ULAŞMANIZI SAĞLAR.

TEMPRAA 1000 ÇIKOLATA TEMPERLEME MAKINASI ÇOĞUNLUĞU BETA 5 (BV) KRİSTALLERİNİ İÇEREN YAPI FORMLARINI OLUŞTURUR. ÜRÜNDE BÖYLECE;

PARLAK GÖRÜNÜM
MÜKEMMEL KIRILGANLIK
SAĞLAM YAPI
YÜKSEK YAĞ GÖÇÜ DİRENCİ
UZUN RAF ÖMRÜ

WE HAVE REDESIGNED THE TRADITIONAL INDUSTRIAL CHOCOLATE TEMPERING METHOD TO ACHIEVE THE MOST PERFECT RESULTS.

THE TEMPRAA 1000 CHOCOLATE TEMPERING MACHINE FEATURES A SPECIALLY DESIGNED SCRAPER BLADE, UNIQUE PRODUCT FLOW CYCLE, REINFORCED HEAT CONTROL SYSTEM, USER-FRIENDLY INTERFACE SCREEN, AND COMPACT MACHINE DIMENSIONS TO ENSURE THE HIGHEST QUALITY PRODUCT OUTPUT.

THE TEMPRAA 1000 CHOCOLATE TEMPERING MACHINE FORMS STRUCTURES THAT MOSTLY CONTAIN BETA 5 (BV) CRYSTALS, RESULTING IN:

SHINY APPEARANCE
EXCELLENT BRITTLINESS
ROBUST STRUCTURE
HIGH RESISTANCE TO FAT BLOOM
LONG SHELF LIFE

SERİ	CNF.TMP 500	CNF.TMP 1000	CNF.TMP 2000	SERIAL NO	CNF.TMP 500	CNF.TMP 1000	CNF.TMP 2000
KAPASİTE	500 KG/H	1000 KG/H	2000KG/H	CAPACITY	500 KG/H	1000 KG/H	2000KG/H
GÜÇ	21 KW 380 V	22 KW 380 V	28 KW 380 V	POWER	21 KW 380 V	22 KW 380 V	28 KW 380 V
GENİŞLİK	1250 MM	1370 MM	1450 MM	WIDTH	1250 MM	1370 MM	1450 MM
UZUNLUK	1000 MM	1100 MM	1200 MM	LENGTH	1000 MM	1100 MM	1200 MM
YÜKSEKLİK	1850 MM	1900 MM	2100 MM	HEIGHT	1850 MM	1900 MM	2100 MM
AĞIRLIK	800 KG	1200 KG	1500 KG	WEIGHT	800 KG	1200 KG	1500 KG



CHOCOLATE BALL MILL

ÇIKOLATA, KREMA VE DİĞER YAĞ BAZLI ÜRÜNLERİN ÖĞÜTÜLMESİNDE VERİMLİLİĞİNİ ARTIRMAK İSTEYEN ÜRETİCİLERİN KAPASİTE İHTİYAÇLARINI KARŞILAMAK ÜZERE GELİŞTİRİLMİŞTİR. ÖZEL OLARAK TASARLANMIŞ ÇİFT POMPALI SÜREKLİ ÜRÜN SİRKÜLASYON SİSTEMİ, SAATTE 5 TON ÜRÜN SİRKÜLASYONU İLE DAHA KISA SÜREDE DAHA DÜŞÜK İNCELİK ELDE ETME OLANAĞI SAĞLAR. YENİLENEN ÖĞÜTME ÇAPALARI İLE BİLYELERİN HAREKETİ ARTIRILMIŞTIR. BU SAYEDE ÜRÜNLERİNİZİN EN YÜKSEK VE TUTARLI KALİTEYE ULAŞMASINI SAĞLAR. ISI CEKETLİ GÖVDE YAPISI, SU ISITMAK İÇİN SİRKÜLASYON POMPASI VE MANYETİK SU SEVİYE GÖSTERGESİNE SAHIPTIR. MAKİNENİN TÜM FONKSİYONLARI, KULLANICI DOSTU BİR ARAYÜZE SAHİP PLC PANELİNDEN KOLAYCA KONTROL EDİLİR. TAMAMEN PASLANMAZ ÇELİK VE HIJYENİK MALZEMELERDEN TASARLANMIŞ OLMASI SAYESİNDE EN YÜKSEK STANDARTLARI KARŞILAR VE KOLAY VE PRATİK TEMİZLİK İMKANI SUNAR.

IT HAS BEEN DEVELOPED TO MEET THE CAPACITY NEEDS OF MANUFACTURERS WHO WANT TO INCREASE THEIR EFFICIENCY FOR GRINDING CHOCOLATE, CREAM AND OTHER OIL-BASED PRODUCTS. THE SPECIALLY DESIGNED DOUBLE PUMP CONTINUOUS PRODUCT CIRCULATION SYSTEM PROVIDES THE OPPORTUNITY TO OBTAIN LOWER FINENESS IN A SHORTER TIME WITH THE CIRCULATION OF 5 TONS OF PRODUCT PER HOUR. THE MOVEMENT OF THE BALLS HAS BEEN INCREASED WITH THE RENEWED GRINDING HOES. THEREFORE, IT ENSURES YOUR PRODUCTS REACHING THE HIGHEST AND CONSISTENT QUALITY. IT HAS HEAT JACKETED BODY STRUCTURE, CIRCULATION PUMP FOR HEATING WATER AND MAGNETIC WATER LEVEL INDICATOR. ALL FUNCTIONS OF THE MACHINE ARE EASILY CONTROLLED FROM THE PLC PANEL HAVING A USER-FRIENDLY INTERFACE. IT IS COMPLETELY DESIGNED WITH STAINLESS STEEL AND HYGIENIC MATERIALS; THUS, IT MEETS THE HIGHEST STANDARDS AND ALLOWS EASY AND PRACTICAL CLEANING



SERİ	CNF.BM 600	CNF.BM 1000	SERIAL NO	CNF.BM 600	CNF.BM 1000
KAPASİTE	600 KG/H	1000 KG/H	CAPACITY	600 KG/H	1000 KG/H
GÜÇ	15 KW 66 RPM	22 KW 110 RPM	POWER	15 KW 66 RPM	22 KW 110 RPM
POMPA GÜÇ	2.2 KW 100 RPM	4.4 KW 100 RPM	PUMP POWER	2.2 KW 100 RPM	4.4 KW 100 RPM
ELEKTRİK REZİTANS GÜÇ	9KW	9.9 KW	ELECTRIC RESIDENSE POWER	9KW	9.9 KW
TOPLAM GÜÇ	26.2 KW	35.4 KW	TOTAL POWER	26.2 KW	35.4 KW

CONTINUOUS BALL MILL

ÇIKOLATA BİLEŞENLERİ, SÜRÜLEBİLİR ÜRÜNLER, DOLGU VE KAPLAMA KREMLARI, ERITİLMİŞ KAKAO KÜTLELERİ, FINDIK EZMELERİ VE DİĞER YAĞ BAZLI ÜRÜNLERİN İNCE ÖĞÜTÜLMESİ İÇİN GELİŞTİRİLMİŞTİR. ÖZEL OLARAK TASARLANMIŞ ÖĞÜTME SİSTEMİ, DÜŞÜK SICAKLIKLARDA TEK AŞAMALI ÖĞÜTME SAĞLAYARAK ÜRÜNÜNÜZÜN EN YÜKSEK VE TUTARLI KALİTESİNİ GARANTİ EDER. AKILLI KONTROL SİSTEMİ, GÜÇ GİRİŞİNİ, ÜRÜN SICAKLIĞINI VE ÜRÜN ÇIKIŞINI DÜZENLER. OPERATÖR BECERİLERİNDEN VE HAMMADDE KALİTESİNDEKİ DALGALANMALAR DAN BAĞIMSIZ OLARAK, HER ZAMAN HOMOJEN BİR ÜRÜN KALİTESİ SAĞLANIR. KÜÇÜK ÖĞÜTME HAZNESİ HACMI (DİĞER BİLYALI DEĞİRMENLERE GÖRE 4 İLA 6 KAT DAHA KÜÇÜK), HIZLI TEMİZLİĞE OLANAK TANIR. AYRICA, DAHA AZ ÜRÜN İSRAFIYLA BİR ÜRÜN DEN DİĞERİNE GEÇMEYİ KOLAYLAŞTIRIR. ÖĞÜTME HAZNESİNİN BENZERSİZ TASARIMI, MINIMUM %30 DAHA AZ ENERJİ TÜKETİMİ SAĞLAR, BU NEDENLE EKONOMİK VE SON DERECE VERİMLİ BİR ÖĞÜTME İŞLEMİ GERÇEKLEŞTİRİLİR. ERGONOMİK TASARIMI SAYESİNDE, DİĞER BİLYALI DEĞİRMENLERE KIYASLA KAPASİTE BAŞINA EN KÜÇÜK AYAK İZİNE SAHIPTIR VE BAKIMI KOLAYDIR. MAKİNENİN TÜM FONKSİYONLARI, KULLANICI DOSTU BİR ARAYÜZE SAHİP PLC PANELİNDEN KOLAYCA KONTROL EDİLİR. 20-25 MİKRON İNCELİK İÇİN REFERANS KÜTLE; (MINIMUM %30 YAĞ, MAKSİMUM %15 SÜT TOZU İÇEREN ÇIKOLATA KÜTLESİ.)

IT IS DEVELOPED FOR FINE GRINDING OF CHOCOLATE COMPOUNDS, SPREADABLE PRODUCTS, FILLING AND COATING CREAMS, MOLTEN COCOA MASSES, HAZELNUT PASTES AND OTHER OIL-BASED PRODUCTS. THE SPECIALLY DESIGNED GRINDING SYSTEM PROVIDES ONE-STEP GRINDING AT LOW TEMPERATURES, ENSURES THE HIGHEST AND CONSISTENT QUALITY OF YOUR PRODUCT. SMART CONTROL SYSTEM REGULATES POWER INPUT, PRODUCT TEMPERATURE AND PRODUCT OUTPUT. REGARDLESS OF OPERATOR SKILLS AND RAW MATERIAL QUALITY FLUCTUATIONS, A UNIFORM PRODUCT QUALITY IS ENSURED AT ALL TIMES. SMALL GRINDING CHAMBER VOLUME (4 TO 6 TIMES SMALLER THAN OTHER BALL MILLS) ALLOWS FOR QUICK CLEANING. IT ALSO MAKES IT EASY TO SWITCH FROM ONE PRODUCT TO ANOTHER WITH LESS PRODUCT WASTAGE. THE UNIQUE DESIGN OF THE GRINDING CHAMBER PROVIDES A MINIMUM OF 30% LESS ENERGY CONSUMPTION, THEREFORE ECONOMICAL AND HIGHLY EFFICIENT GRINDING PROCESS IS REALIZED. THANKS TO ITS ERGONOMIC DESIGN, IT HAS THE SMALLEST FOOTPRINT PER CAPACITY COMPARED TO OTHER BALL MILLS AND HAS EASY MAINTAINING. ALL FUNCTIONS OF THE MACHINE ARE EASILY CONTROLLED FROM THE PLC PANEL HAVING A USER-FRIENDLY INTERFACE. REFERENCE MASS FOR 20-25 MICRON FINENESS; (CHOCOLATE MASS CONTAINING MIN. 30% FAT, MAX. 15% MILK POWDER.)



SERİ
KAPASİTE
GÜÇ
POMPA GÜÇ
ELEKTRİK REZİTANS GÜÇ
TOPLAM GÜÇ

CNF.CBM 1000
1000 KG/H
55 KW
3 KW 100 RPM
9.9 KW
68 KW

SERIAL NO
CAPACITY
POWER
PUMP POWER
ELECTRIC RESİDENSE POWER
TOTAL POWER

CNF.CBM 1000
1000 KG/H
55 KW
4.4 KW 100 RPM
9.9 KW
68 KW

CHOCOLATE STOCK TANK

ÇIKOLATA, KREMA VB. ÜRÜNLERİ İSTEDİĞİNİZ ZAMAN DİNLENDİRMEK, STOKLAMAK VE AKTARMAK İÇİN TASARLANMIŞTIR. VERİMLİLİĞİNİ ARTIRMAK İSTEYEN ÜRETİCİLERİN İHTİYAÇLARINI KARŞILAMAK İÇİN ÇEŞİTLİ KAPASİTELERDE ÜRETİLMEKTEDİR. ISI CEKETLİ GÖVDE YAPISI, SU ISITMAK İÇİN SİRKÜLASYON POMPASI VE MANYETİK SU SEVİYE GÖSTERGESİNE SAHIPTIR. DÜŞÜK HIZLI KARIŞTIRICI, AYARLANAN SÜREYE GÖRE PERİYODİK OLARAK ÇALIŞTIĞI İÇİN ÜRÜNÜN YAPISI BOZULMAZ VE ENERJİ TASARRUFU SAĞLANIR. TAMAMEN PASLANMAZ ÇELİK VE HIJYENİK MALZEMELERDEN ÜRETİLEN ÜRÜN, EN YÜKSEK STANDARTLARI KARŞILAR VE KOLAY VE PRATİK TEMİZLİK İMKANI SUNAR.

IT IS DESIGNED FOR RESTING, STOCKING AND TRANSFERRING PRODUCTS LIKE CHOCOLATE, CREAM, ETC. AT ANY TIME. IT IS PRODUCED IN VARIOUS CAPACITIES TO MEET THE NEEDS OF MANUFACTURERS WHO WANT TO INCREASE THEIR PRODUCTIVITY. IT HAS HEAT JACKETED BODY STRUCTURE, CIRCULATION PUMP FOR HEATING WATER AND MAGNETIC WATER LEVEL INDICATOR. THE LOW-SPEED MIXER RUNS PERIODICALLY ACCORDING TO THE SET TIME; THEREFORE THE STRUCTURE OF THE PRODUCT IS NOT DETERIORATED AND ENERGY SAVING IS ACHIEVED. IT IS COMPLETELY DESIGNED WITH STAINLESS STEEL AND HYGIENIC MATERIALS; THUS IT MEETS THE HIGHEST STANDARDS AND ALLOWS EASY AND PRACTICAL CLEANING.

SERİ	CNF.ST 500	CNF.ST 1000	CNF.ST 2000	CNF.ST 3000
KAPASİTE	500 KG	1000 KG	2000 KG	3000 KG
GÜÇ	1.1 KW 28 RPM	1.5 KW 28 RPM	1.5 KW 28 RPM	2.2 KW 28 RPM
POMPA GÜÇ	1.1 KW 100 RPM	1.5 KW 100 RPM	2.2 KW 100 RPM	2.2 KW 100 RPM
ELEKTRİK REZİTANS GÜÇ	9KW	9.9 KW	9.9 KW	9 KW
TOPLAM GÜÇ	11 KW	12 KW	13 KW	15 KW

SERİ	CNF.ST 500	CNF.ST 1000	CNF.ST 2000	CNF.ST 3000
CAPACITY	500 KG	1000 KG	2000 KG	3000 KG
POWER	1.1 KW 28 RPM	1.5 KW 28 RPM	1.5 KW 28 RPM	2.2 KW 28 RPM
PUMP POWER	1.1 KW 100 RPM	1.5 KW 100 RPM	2.2 KW 100 RPM	2.2 KW 100 RPM
ELECTRIC RESIDENSE POWER	9KW	9.9 KW	9.9 KW	9 KW
TOTAL POWER	11 KW	12 KW	13 KW	15 KW



CHOCOLATE PREPARATION

KOLAY KULLANIM AVANTAJI SAĞLAMAK İÇİN YATAY OLARAK TASARLANMIŞTIR. DAHA KISA SÜREDE HOMOJEN KARIŞIMLAR ELDE ETMEK İÇİN ÖZEL OLARAK GELİŞTİRİLMİŞ BİR MİKSER SİSTEMİNE SAHIPTIR. HAMMADDELERİN KOLAYCA YÜKLENMESİ İÇİN ALÇAK, GENİŞ AÇILABİLİR KAPAK VE GÜVENLİK İÇİN IZGARA SİSTEMİ İLE TASARLANMIŞTIR. ISI CEKETLİ GÖVDE YAPISI, SU ISITMAK İÇİN SİRKÜLASYON POMPASI VE MANYETİK SU SEVİYE GÖSTERGESİNE SAHIPTIR. TAMAMEN PASLANMAZ ÇELİK VE HIJYENİK MALZEMELERDEN ÜRETİLMİŞTİR; BU SAYEDE EN YÜKSEK STANDARTLARI KARŞILAR VE KOLAY VE PRATİK TEMİZLİK SAĞLAR.

IT IS DESIGNED HORIZONTALLY TO PROVIDE AN EASY-TO-USE ADVANTAGE. IT HAS A SPECIALLY DEVELOPED MIXER SYSTEM TO OBTAIN HOMOGENEOUS MIXTURES IN A SHORTER TIME. IT IS DESIGNED WITH LOW HEIGHT, WIDELY OPENABLE LID FOR EASY LOADING OF RAW MATERIALS AND GRID SYSTEM FOR SECURITY. IT HAS HEAT JACKETED BODY STRUCTURE, CIRCULATION PUMP FOR HEATING WATER AND MAGNETIC WATER LEVEL INDICATOR. IT IS COMPLETELY DESIGNED WITH STAINLESS STEEL AND HYGIENIC MATERIALS; THUS, IT MEETS THE HIGHEST STANDARDS AND ALLOWS EASY AND PRACTICAL CLEANING.



SERİ	CNF.ST 500	CNF.ST 1000	CNF.ST 2000	CNF.ST 3000
KAPASİTE	500 KG	1000 KG	2000 KG	3000 KG
GÜÇ	1.5 KW 28 RPM	2.2 KW 28 RPM	2.2 KW 28 RPM	3 KW 28 RPM
POMPA GÜÇ	0.75 KW 100 RPM	1.5 KW 100 RPM	2.2 KW 100 RPM	1.5 KW 100 RPM
ELEKTRİK REZİTANS GÜÇ	9KW	9.9 KW	9.9 KW	9 KW
TOPLAM GÜÇ	11 KW	13 KW	13 KW	14 KW
SERİ	CNF.ST 500	CNF.ST 1000	CNF.ST 2000	CNF.ST 3000
CAPACITY	500 KG	1000 KG	2000 KG	3000 KG
POWER	1.1 KW 28 RPM	2.2 KW 28 RPM	2.2 KW 28 RPM	3 KW 28 RPM
PUMP POWER	0.75 KW 100 RPM	1.5 KW 100 RPM	2.2 KW 100 RPM	1.5 KW 100 RPM
ELECTRIC RESIDENSE POWER	9KW	9.9 KW	9.9 KW	9 KW
TOTAL POWER	11 KW	13 KW	13 KW	14 KW

TURBO MIXSER

KOLAY KULLANIM AVANTAJI SAĞLAMAK İÇİN YATAY OLARAK TASARLANMIŞTIR. DAHA KISA SÜREDE HOMOJEN KARIŞIMLAR ELDE ETMEK İÇİN ÖZEL OLARAK GELİŞTİRİLMİŞ BİR MİKSER SİSTEMİNE SAHIPTIR. HAMMADDELERİN KOLAYCA YÜKLENMESİ İÇİN ALÇAK, GENİŞ AÇILABİLİR KAPAK VE GÜVENLİK İÇİN IZGARA SİSTEMİ İLE TASARLANMIŞTIR. ISI CEKETLİ GÖVDE YAPISI, SU ISITMAK İÇİN SİRKÜLASYON POMPASI VE MANYETİK SU SEVİYE GÖSTERGESİNE SAHIPTIR. TAMAMEN PASLANMAZ ÇELİK VE HIJYENİK MALZEMELERDEN ÜRETİLMİŞTİR; BU SAYEDE EN YÜKSEK STANDARTLARI KARŞILAR VE KOLAY VE PRATİK TEMİZLİK SAĞLAR.

IT IS DESIGNED HORIZONTALLY TO PROVIDE AN EASY-TO-USE ADVANTAGE. IT HAS A SPECIALLY DEVELOPED MIXER SYSTEM TO OBTAIN HOMOGENEOUS MIXTURES IN A SHORTER TIME. IT IS DESIGNED WITH LOW HEIGHT, WIDELY OPENABLE LID FOR EASY LOADING OF RAW MATERIALS AND GRID SYSTEM FOR SECURITY. IT HAS HEAT JACKETED BODY STRUCTURE, CIRCULATION PUMP FOR HEATING WATER AND MAGNETIC WATER LEVEL INDICATOR. IT IS COMPLETELY DESIGNED WITH STAINLESS STEEL AND HYGIENIC MATERIALS; THUS, IT MEETS THE HIGHEST STANDARDS AND ALLOWS EASY AND PRACTICAL CLEANING.



SERİ	CNF.ST 500	CNF.ST 1000	CNF.ST 2000	CNF.ST 3000
KAPASİTE	500 KG	1000 KG	2000 KG	3000 KG
GÜÇ	1.5 KW 28 RPM	2.2 KW 28 RPM	2.2 KW 28 RPM	3 KW 28 RPM
POMPA GÜÇ	0.75 KW 100 RPM	1.5 KW 100 RPM	2.2 KW 100 RPM	1.5 KW 100 RPM
ELEKTRİK REZİTANS GÜÇ	9KW	9.9 KW	9.9 KW	9 KW
TOPLAM GÜÇ	11 KW	13 KW	13 KW	14 KW
SERİ	CNF.ST 500	CNF.ST 1000	CNF.ST 2000	CNF.ST 3000
CAPACITY	500 KG	1000 KG	2000 KG	3000 KG
POWER	1.1 KW 28 RPM	2.2 KW 28 RPM	2.2 KW 28 RPM	3 KW 28 RPM
PUMP POWER	0.75 KW 100 RPM	1.5 KW 100 RPM	2.2 KW 100 RPM	1.5 KW 100 RPM
ELECTRIC RESIDENSE POWER	9KW	9.9 KW	9.9 KW	9 KW
TOTAL POWER	11 KW	13 KW	13 KW	14 KW

FAT MELDING

BLOK HALINDEKİ KATI YAĞLARI ERİTMEK, MUHAFAZA ETMEK VE TRANSFER ETMEK İÇİN GELİŞTİRİLMİŞTİR. YENİDEN TASARLANAN SERPANTİN YAPISI, MINIMUM ERITME SÜRESİ VE KULLANIM KOLAYLIĞI AVANTAJI SAĞLAR. ISI ÇEKETLİ GÖVDEYE VE DAHİLİ SERPANTİN SU ISITMA SİSTEMİNE SAHIPTIR. GÖVDE ISITICISINDAN AYRI SU HAZNESİ SAYESİNDE, SERPANTİN SICAKLIĞI GÖVDEDEN BAĞIMSIZ OLARAK İSTENİLEN DEĞERE KOLAYCA AYARLANIR VE BU DEĞERDE SABİT TUTULUR. MAKİNEİNİN TÜM FONKSİYONLARI, KULLANICI DOSTU BİR ARAYÜZE SAHİP PLC PANELİNDEN KOLAYCA KONTROL EDİLİR. ERİYEN YAĞIN DOKUNMATİK EKRANDAN İSTENİLEN MİKTARDA VE HANGİ MAKİNEYE GÖNDERİLECEĞİ OTOMATİK OLARAK SAĞLANIR. TAMAMEN PASLANMAZ ÇELİK VE HIJYENİK MALZEMELERDEN TASARLANMIŞ OLMASI SAYESİNDE EN YÜKSEK STANDARTLARI KARŞILAR VE KOLAY VE PRATİK TEMİZLİĞE OLANAK TANIR.

IT HAS BEEN DEVELOPED TO MELT, PRESERVE AND TRANSFER SOLID FATS IN BLOCK FORM. IT'S REDESIGNED SERPENTINE STRUCTURE PROVIDES THE ADVANTAGE OF MINIMUM MELTING TIME AND EASE OF USE. IT HAS A BODY WITH HEAT JACKET AND INTERNAL SERPENTINE WATER HEATING SYSTEM. THANKS TO THE WATER RESERVOIR SEPARATE FROM THE BODY HEATING, THE COIL TEMPERA-TURE IS EASILY ADJUSTED AT THE DESIRED VALUE INDEPENDENT OF THE BODY AND IS KEPT CONSTANT AT THIS VALUE. ALL FUNCTIONS OF THE MACHINE ARE EASILY CONTROLLED FROM THE PLC PANEL HAVING A USER-FRIENDLY INTERFACE. THE TRANSFER OF MELTED OIL FROM THE TOUCH SCREEN IS PROVIDED AUTOMATICALLY IN THE DESIRED AMOUNT AND TO WHICH MACHINE IT WILL BE SENT. IT IS COMPLETELY DESIGNED WITH STAINLESS STEEL AND HYGIENIC MATERIALS; THUS, IT MEETS THE HIGHEST STANDARDS AND ALLOWS EASY AND PRACTICAL CLEANING.

SERİ	CNF.FM 500
KAPASİTE	500 KG
GÜÇ	15 KW
GENİŞLİK	950 MM
UZUNLUK	1350 MM
YÜKSEKLİK	1100 MM
AGIRLIK	400 KG

SERIAL NO	CNF.FM 1000
CAPACTİY	1000 KG
POWER	25.5 KW
WIDTH	1120 MM
LENGTH	1500 MM
HEIHHT	1300 MM
AGIRLIK	600 KG



POWDER MILL

KRISTAL ŞEKER İÇİN ÖZEL OLARAK TASARLANMIŞ KIRMA SİSTEMİ SAYESİNDE YÜKSEK VERİMLİ ÖĞÜTME VE UZUN ÖMÜRLÜ KULLANIM AVANTAJI SAĞLAR. ÇELIKTEN ÜRETİLEN DEĞİRMEN GÖVDESİ VE SU SOĞUTMALI YATAKLAMA GÖVDESİ SAYESİNDE BAKIM GEREKTİRMEYEN VE SORUNSUZ KULLANIM SAĞLAR. ÖĞÜTÜLMÜŞ PUDRA ŞEKERİ SPIRAL SİSTEMLE AKTARILIR. HAZNEDEKİ ŞEKERİN DEĞİRMENE AKTARIMI, SEVIYE KONTROL SENSÖRÜ İLE OTOMATİK OLARAK YAPILIR. ŞEKER HAZNESİ VE AKTARMA BİLEŞENLERİ PASLANMAZ ÇELIKTEN ÜRETİLMİŞTİR.

KRISTAL ŞEKER İÇİN;

%70 = 80~120 M ARALIĞI,

%20 = 120 M ÜZERİ,

%10 = 80 M'İN ALTINDAKİ ÖĞÜTME KAPASİTESİ.

IT PROVIDES THE ADVANTAGE OF HIGH EFFICIENCY GRINDING AND LONG-LASTING USE THANKS TO ITS CRUSHER SYSTEM SPECIALLY DESIGNED FOR CRYSTAL SUGAR. THANKS TO THE MILL BODY MADE OF STEEL AND THE WATER-COOLED BEDDING BODY, IT PROVIDES MAINTENANCE-FREE AND TROUBLE-FREE USE. GROUND POWDERED SUGAR IS TRANSFERRED BY A SPIRAL SYSTEM. TRANSFER OF THE SUGAR IN THE CHAMBER TO THE MILL IS DONE AUTOMATICALLY WITH THE LEVEL CONTROL SENSOR. SUGAR CHAMBER AND TRANSFERRING COMPONENTS ARE MADE OF STAINLESS STEEL.

FOR CRYSTAL SUGAR;

70% = RANGE OF 80~120 M,

20% = ABOVE 120 M,




10% = GRINDING CAPACITY BELOW 80 M.

SERİ	CNF.PM 500
KAPASİTE	500 KG
GÜÇ	15 KW
GENİŞLİK	1850 MM
UZUNLUK	1100 MM
YÜKSEKLİK	1950 MM

SERIAL NO	CNF.PM 1000
CAPACTİY	1000 KG
POWER	14.5 KW
WIDTH	2145 MM
LENGTH	1100 MM
HEIHHT	2200 MM




TABLET CHOCOLATE

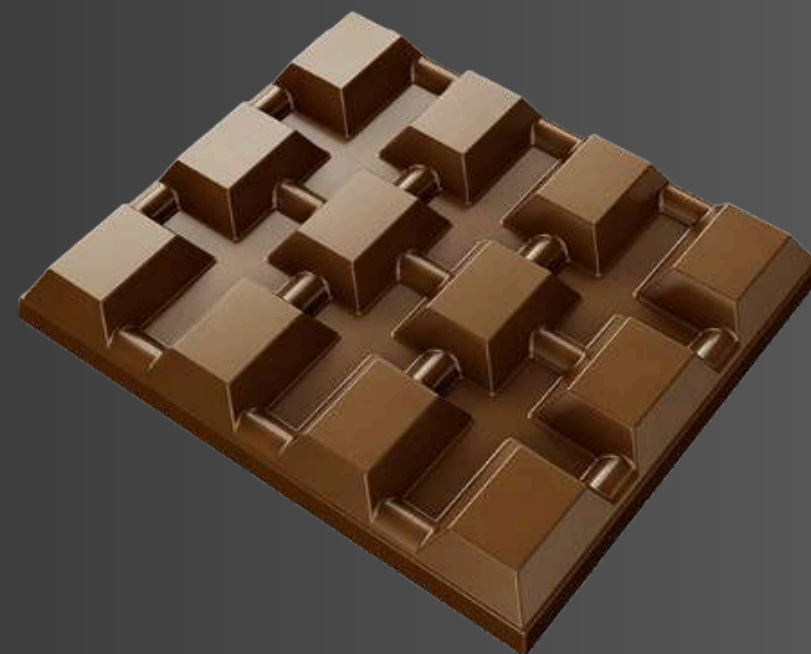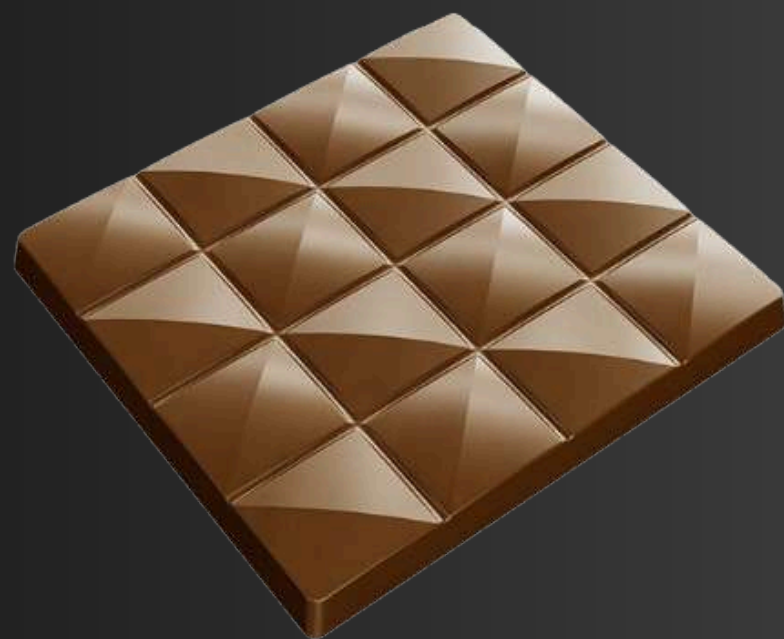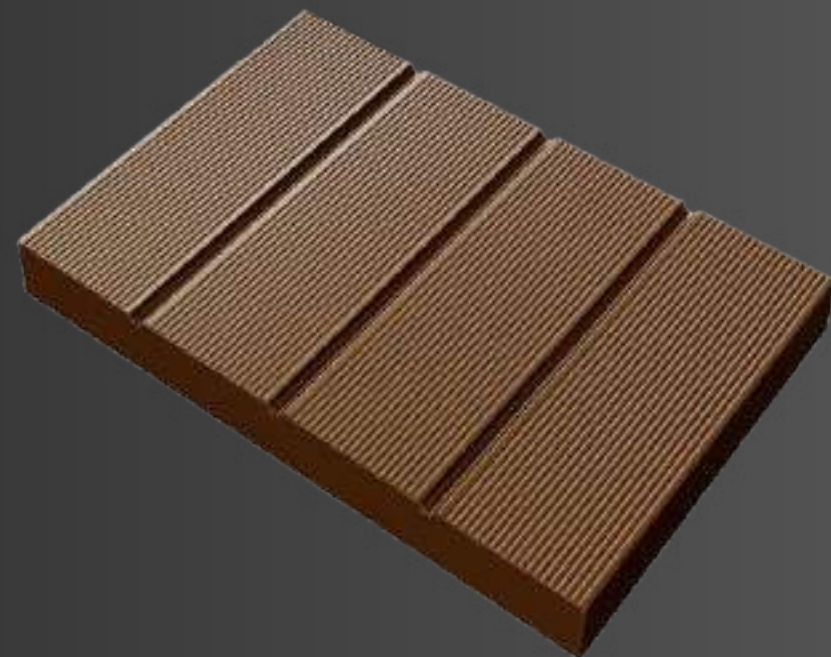

NAPOLITEN CHOCOLATE





MADLEN CHOCOLATE

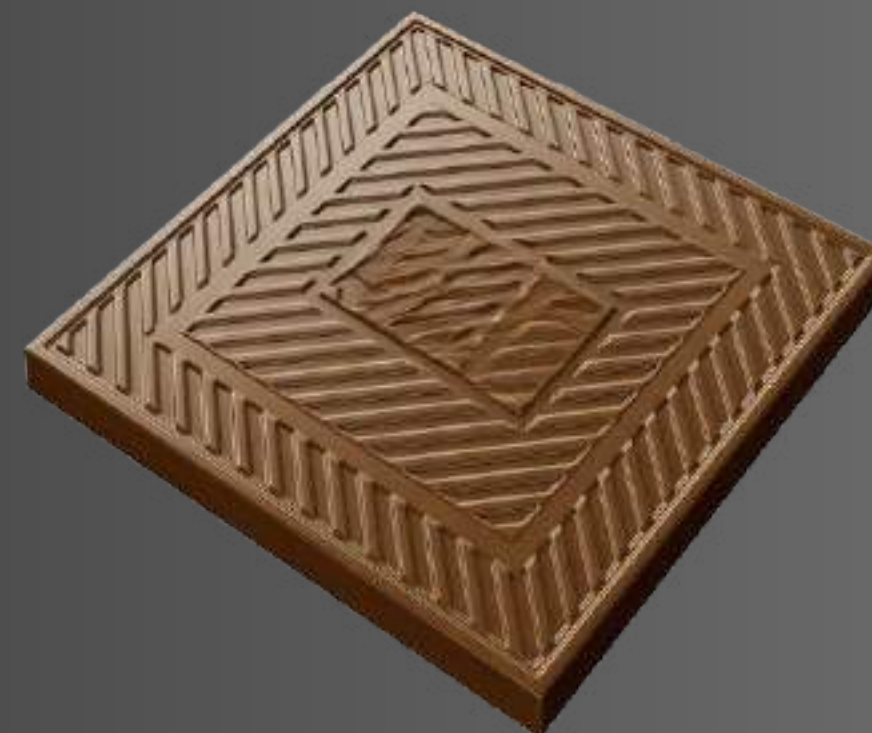

ÇIKOLATIN CHOCOLATE



ÇALIŞMALARIMIZ

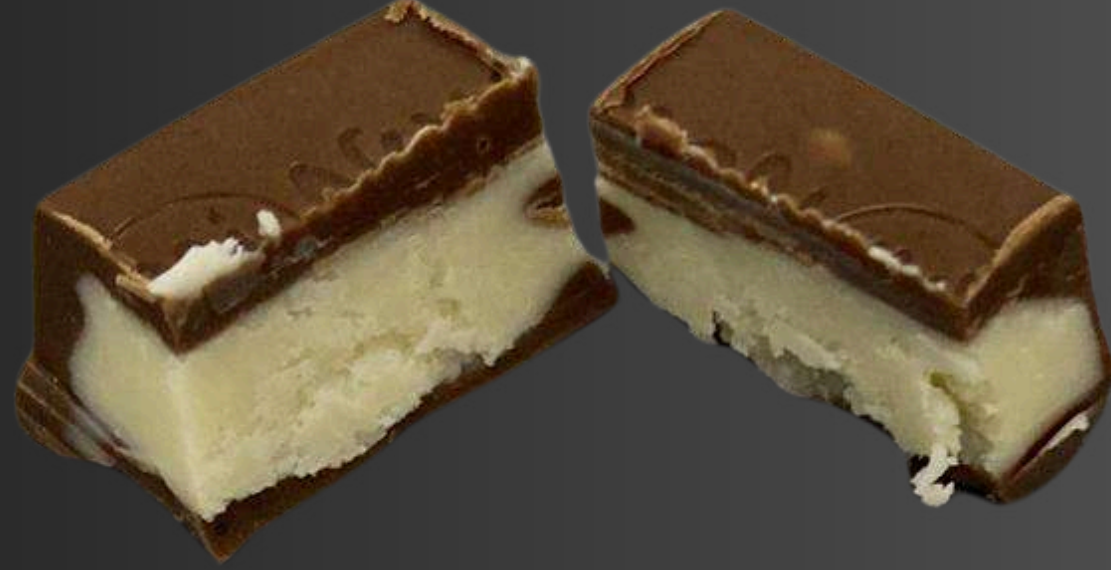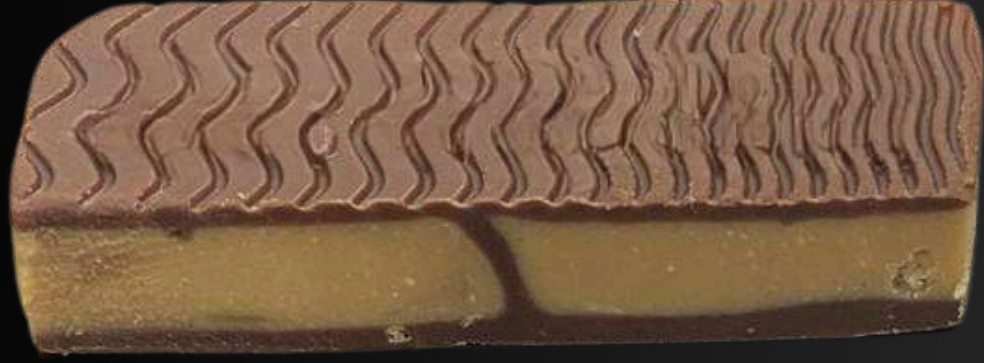

Everything For Chocolate

